

# Changing the Brush Heads


## To unscrew the Brush Head

1. Grasp the BRUSH HEAD between your fingers
2. Turn the WAND with the other hand in anti clockwise.





## To screw on a new Brush Head

1. Hold the BRUSH HEAD in one hand and apply the thin wire to the start of the SPRING held with the other hand.

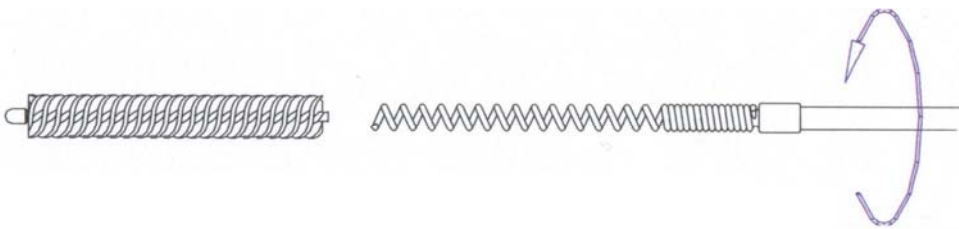

2. Turn the WAND clockwise and stop screwing when it gently jammed inside the SPRING.

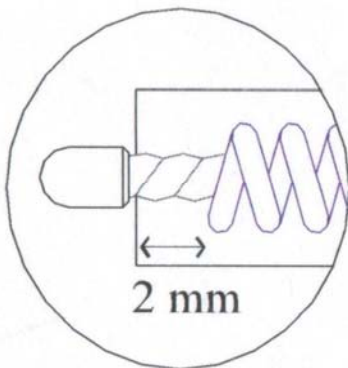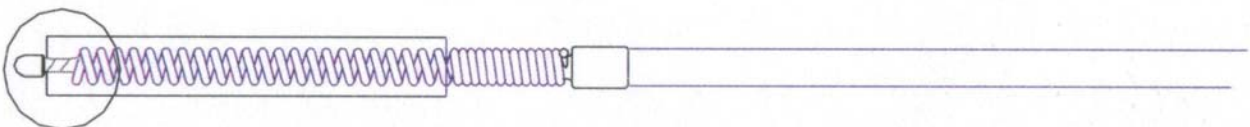

3. The protective tip should be approximately 2 to 3 mm above the SPRING's end point.

